


ReActiveMicro.com

Apple II Plus, Rev 7 RFI Motherboard

ReActiveMicro.com offers two versions of its Rev 7 RFI Motherboards. One uses 93-series ROMs and is fully compatible with ROMX. You can use this motherboard even if you do not have any of the original ROMs.

The 27-series motherboard is designed to use 27xx type EPROMs and corrects the INH pin polarity by adding a 74LS04 inverter chip in the normally vacant location H11.

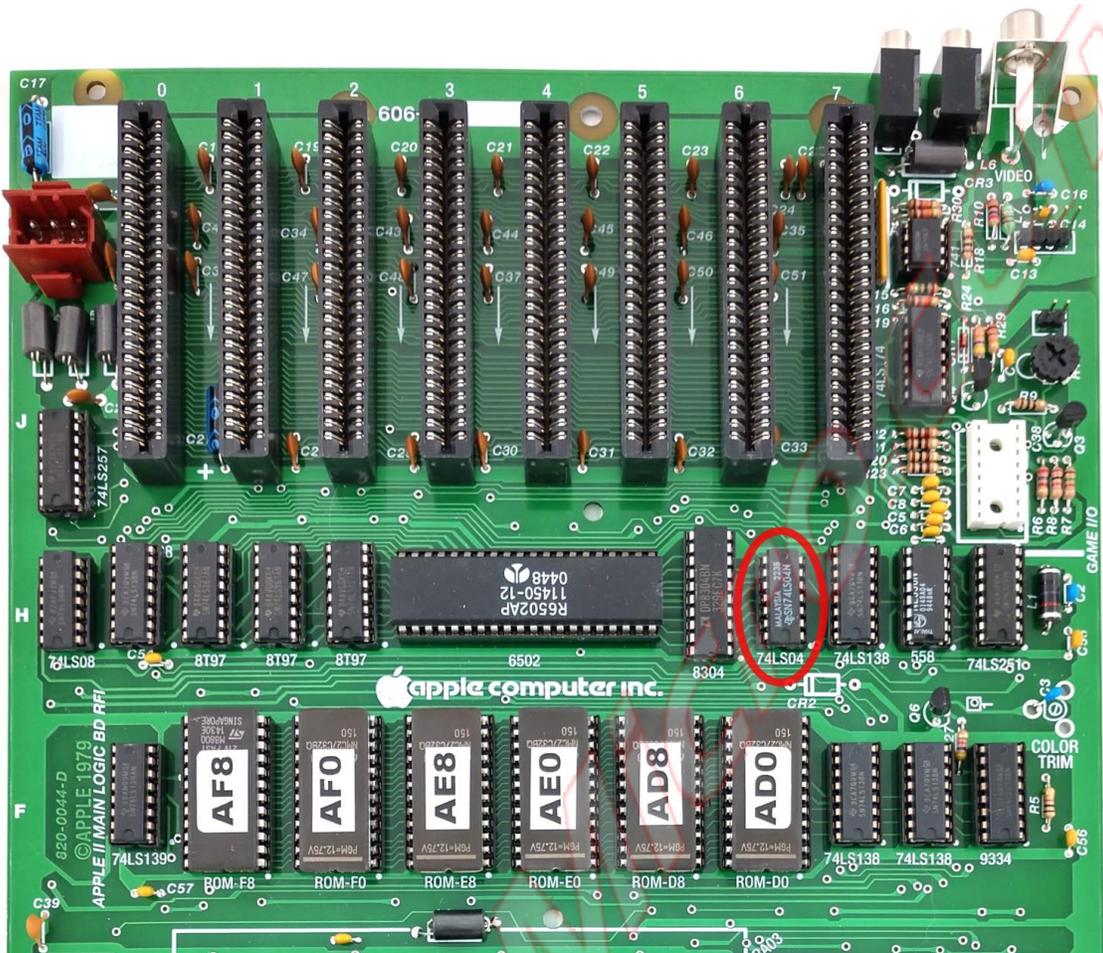

Aside from power and ground, only two pins on this chip are used: 8 and 9. To work with ROMX, you need to remove this chip and add a small jumper between these two pins. This could be done using a 14-pin DIP header or component carrier. Or you can just insert a small jumper wire into the two socket pins.